

JUNO 300

EMERGENCY TWIN SPOT NON-MAINTAINED

JUNO 300 is the ideal solution for adjustable, non-maintained emergency lighting. The high light output suits higher mounting applications and where flexibility is a prime consideration.




Features

- Tough IK06 construction
- Fully adjustable LED projector flood heads
- 120° beam angle
- Fast and easy to install

Specification

Material:	Polycarbonate
Colour Temperature:	6500K
Colour Finish:	White RAL9003
CRI	Ra>80
LED Lifetime:	L70B50 36,000 Hrs
IP Rating:	IP20
IK Rating:	IK06
Working Temperature:	0°C to 45°C
Emergency Battery Type:	LiFePO4 (3hr non-maintained)
Electrical Class:	Class: II
Guarantee:	5 Years (batteries 2 years)

Dimensions

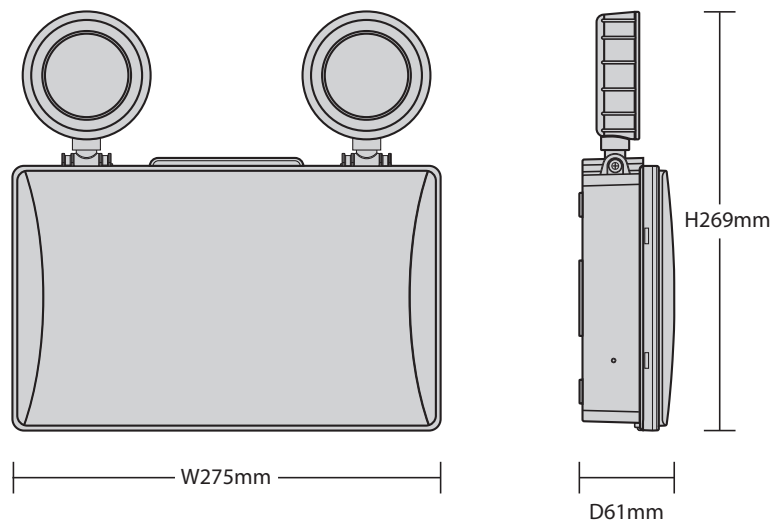

Product Code	Description	Wattage	Lumen Output	Net Weight (kg)	Barcode
JUN/300	Juno Emergency Twin Spot Non-Maintained	2.2W	300 lm (2x150 lm)	0.7	5055807624428



Fully adjustable LED projector flood heads.



LED charge, Lamp Healthy and Test features



www.redarrowelectrical.co.uk

